



bar

APR3860

High Temperature Flush Diaphragm Pressure Transmitter

FEATURES

- High operating temperatures of up to 250°C
- Easy clean flush membrane to prevent clogging
- Thick film sensor technology for long service life
- Pressure ranges to 400 bar
- Good chemical compatibility for a range of applications



SPECIFICATIONS

The APR3860 high temperature pressure transmitter has been designed to meet the requirements of the majority of industrial pressure measurement applications where a hygienic flush diaphragm connection is required. Robustly constructed from stainless steel, the APR3860 pressure transmitter permits accurate pressure measurement at elevated temperatures. The flush membrane can be easily cleaned for long term reliability and outstanding performance.


An optional weldable boss is available to ensure flush-face installation of transmitter to tanks and pipe-work. An optional ATEX and IECEx approved version of this product is available for explosion protection for flammable gases (zone 0), dusts (zone 20) and mining areas (group I M1).

Typical applications include:

- Food processing
- Pharmaceutical
- Petrochemical



DIMENSIONS (in mm)

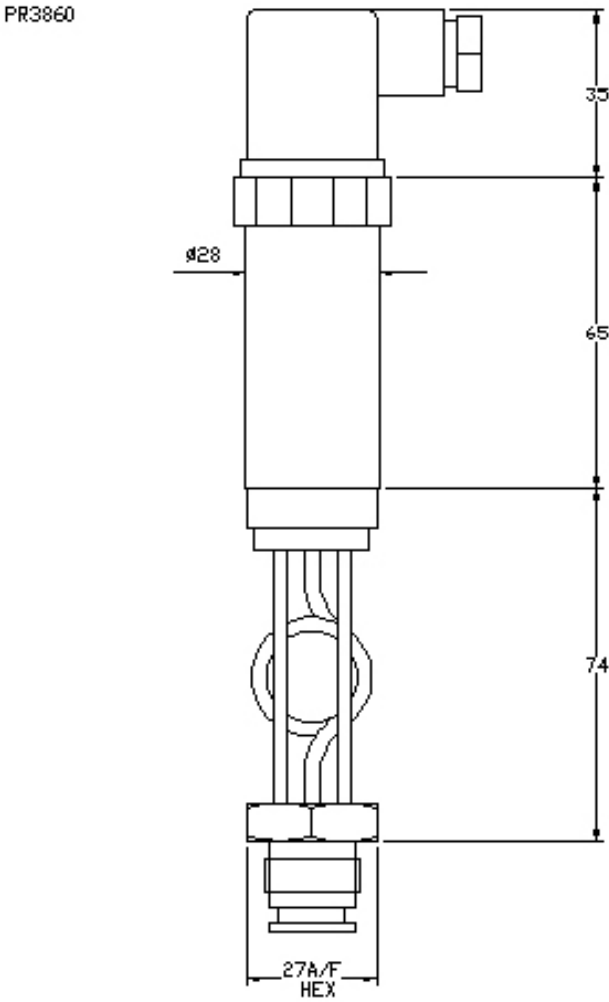

ELECTRICAL CONNECTIONS

PIN No.	mA	VDC	
	2 wire	3 wire	4 wire
1	+supply	common	-supply
2	4-20mA signal	+supply	+supply
3	N/C	+output	+output
↓	to case	to case	to case



TECHNICAL DATA

Type	APR3860	APR3861	APR3862
Sensor Technology:	Ceramic Thick Film		
Output Signal:	4-20 Ma (2 wire)	0-5 V (4 wire)	0-10 V (4 wire) (3 wire available on request)
Supply Voltage:	13-36 VDC	13-30 VDC	13-30 VDC
Pressure Reference:	Gauge		
Protection of Supply Voltage:	Protected against supply voltage reversal up to 50 V		
Standard Pressure Ranges (bar):	0 – 10 bar; 0 – 25 bar; 0 – 60 bar; 0 – 100 bar; 0 – 250 bar; 0 – 400 bar (other options available)		
Standard Pressure Ranges (psi):	0-20 psi; 0-60 psi; 0-150 psi; 0-350 psi; 0-1500 psi; 0-3600 psi; 0-5800 psi (other options available)		
Overpressure Safety:	1.5x all ranges		
Load driving Capability:	4-20 mA: RL < [UB-13V] / 20mA (e.g. with supply voltage (UB) of 36V max. load (RL) is 1150); 2mV/V: n/a; 0-5: max load RL > 5 K; 0-10V: max load RL > 10K		
Accuracy NLHR:	< +0.3 % of span BFSL		
Zero Offset & Span Tolerance:	+1.0 %FS at room temperature (PR3101: +0.2 mV); 5 %FS (approx.) adjustment with easy access trimming potententionmeters on amplified versions only		
Operating Ambient Temperature:	-20C to +85C (-4F + 185F)		
Operating Media Temperature:	0C TO +205C ('+32F TO 185F) with standard o-ring; 0C to '+250C (+32F TO +482F) with optional o-ring (sensor and electronics thermally insulated from media temperature)		
Storage Temperature:	+5 to +40C (+41F to +104F) Recommended Best Practice		
Temperature Effects:	+2.5 %FS total error band for -20 to +70C. Typical thermal zero and span coefficients +0.04 %FS/C		
ATEX/IECEx Approval (4-20 mA version only):	EX II 1 G Ex ia IICT4 GA (Zone 0) Ex II 1 D Ex ia IIIC T135 C Da (Zone 20)	n/a	
ATEX/IECEx Saftey Values:	Ui = 28 V / Li = 119mA / Pi = 0.65 W / Li = 0.1 pH / Ci = 62 nF. Temperature Range = '- 20C to '+70C. Max. cable length = 105m	n/a	
Electromagnetic Campatibility:	Emissions: EN61000-6-3; Immunity: EN6100-6-2; Certification: CE Marked		
Insulation Resistance:	> 100 M @ 50 VDC		
Wetted Parts:	SAE 316L stainless steel		
Pressure Media:	All fluids compatible with SAE 316L stainless steel		
Pressure Connection:	1/2" BSP male (G1/2) with standard integral viton (FKM) o-ring seal and flush SAE 316L stainless steel diaphragm. O-ring seal is for service temperaature up to max. 205C. An alternative o-ring material can be provided for service up to 250C (changed accessory)		
Electrical Connection:	Mating socket EN175301-803 Form A (ex DIN43650) rated IP65 with PG9 cable entry (other options available)		
Net. Weight (Kg):	0.8 kg		



ORDER MATRIX

Output	Wires	Type	Electrical Connection/Options	Pressure Range	Process Connection	Options
4-20 mA	2	APR3860				
0-5 Vdc	4	APR3861				
0-10 Vdc	4	APR3862				
Electrical Connections/Options						
Din plug and socket						
Cable outlet 1m screened						
M12 connector						
Cable outlet 1m screened IP67 protection						
ATEX/IECEx certified with DIN EN175301 plug socket						
Pressure Range in bar						
0-10 bar						
0-25 bar						
0-60 bar						
0-100 bar						
0-250 bar						
0-400 bar						
Process Connection						
1/2" BSP flush diaphragm male						
Options						
250C rated o-ring, fitted						
Order Number Example			APR3860-0400BA-HT			

For options not listed please contact the sales team

DISCLAIMER: We reserve the right to change specifications without prior notice. specifications without prior notice. All manufactured products are calibrated with precision calibration equipment that is traceable to national measurement standards.